AUTODOC CLUB

How to change air filter on **AUDI A5 Coupe (8T3)** – replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:
AUDI A5 Coupe (8T3) 2.0 TDI, AUDI A5 Coupe (8T3) 1.8 TFSI, AUDI A5 Coupe (8T3) 2.0 TDI quattro, AUDI A5 Coupe (8T3) 2.0 TFSI, AUDI A5 Coupe (8T3) 2.0 TFSI quattro, AUDI A5 Coupe (8T3) 2.0 TFSI Flexfuel quattro

---

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: AUDI A4 Saloon (8K2, B8) 2.0 TFSI Flexfuel quattro

REPLACEMENT: AIR FILTER – AUDI A5 COUPE (8T3). LIST OF THE TOOLS YOU'LL NEED:



- Drive socket # 7
- Torx bit T30
- Ratchet wrench
- Microfibre towel
- Fender cover

Buy tools

AUTODOC recommends:

- Replacement: air filter – AUDI A5 Coupe (8T3). Do not ignore the maintenance schedule, recommendations, and requirements specified by the manufacturer on the use of the car part.
- All work should be done with the engine stopped.

REPLACEMENT: AIR FILTER – AUDI A5 COUPE (8T3). RECOMMENDED SEQUENCE OF STEPS:

1. Open the bonnet.

2. Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3. Unplug the mass air flow sensor connector.




4. Detach the air intake hose clamp. Use a drive socket #7. Use a ratchet wrench.




5 Disconnect the air intake pipe from the air filter housing.




6 Undo the fastening screws of the air filter cover. Use Torx T30. Use a ratchet wrench.

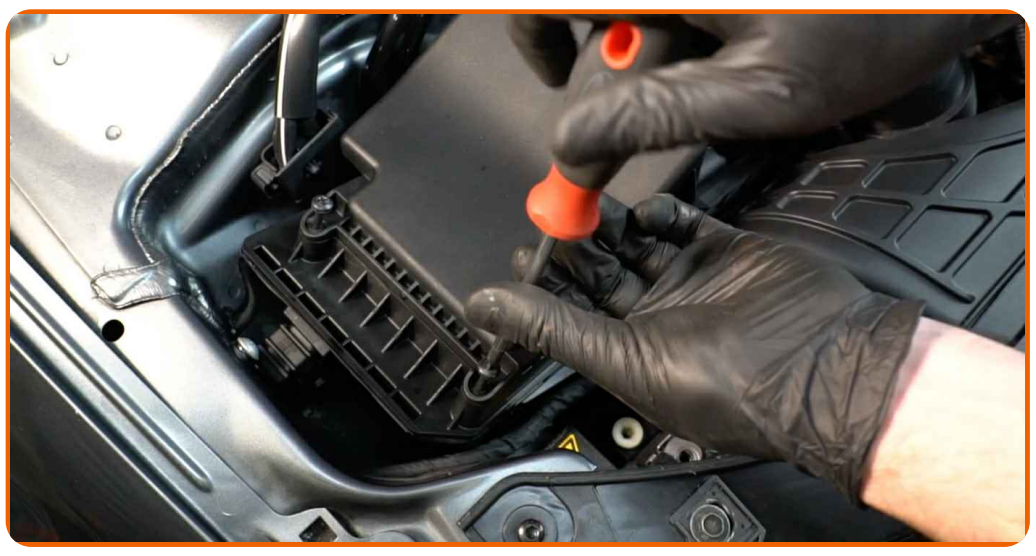

7 Cover the air intake hose with a microfibre towel to prevent dust and dirt from getting into the system.

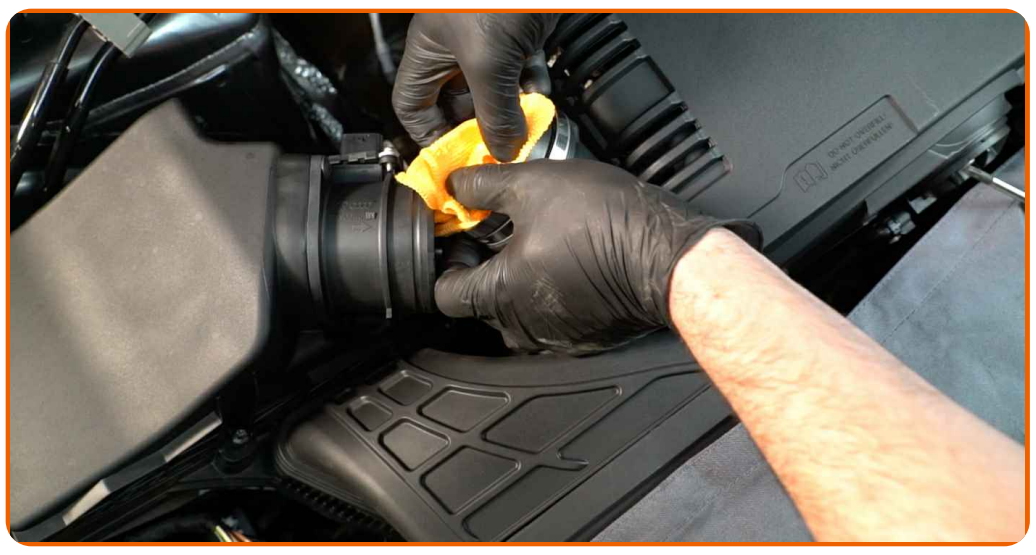


8 Take off the filter lid.

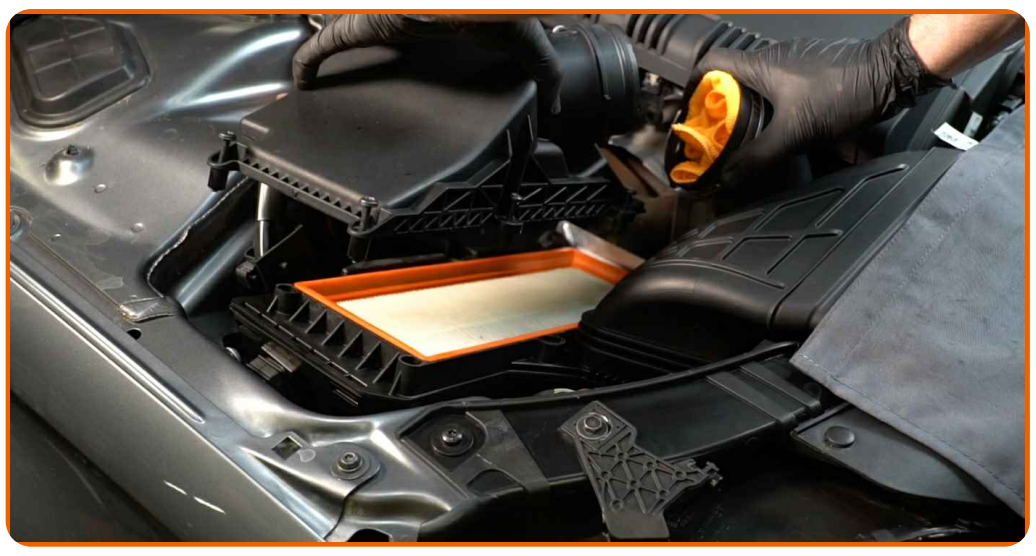


Replacement: air filter – AUDI A5 Coupe (8T3). AUTODOC experts recommend:

- Remove the part vertically with respect to the engine cover.

9 Remove the filter element from the filter housing.

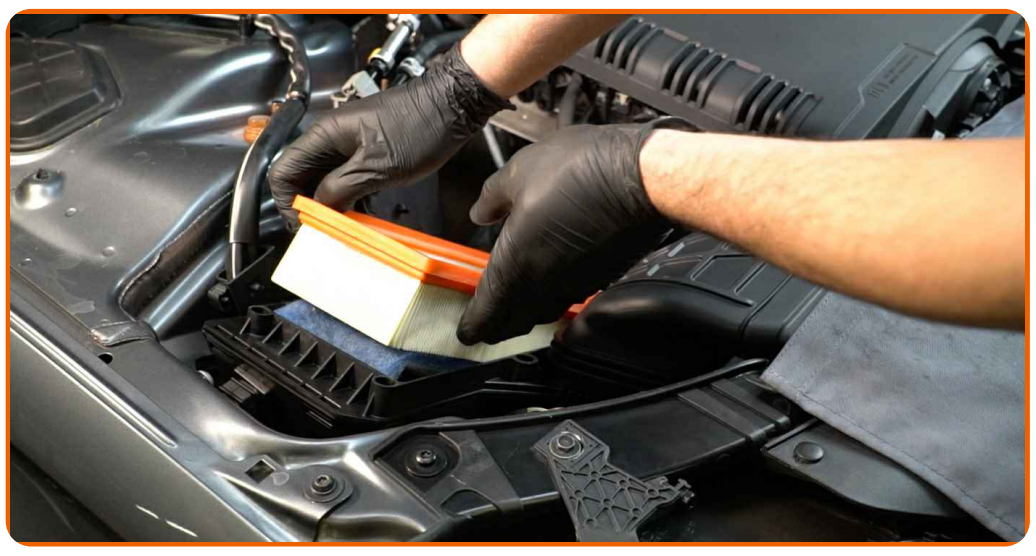


10 Clean the air filter cover and housing.

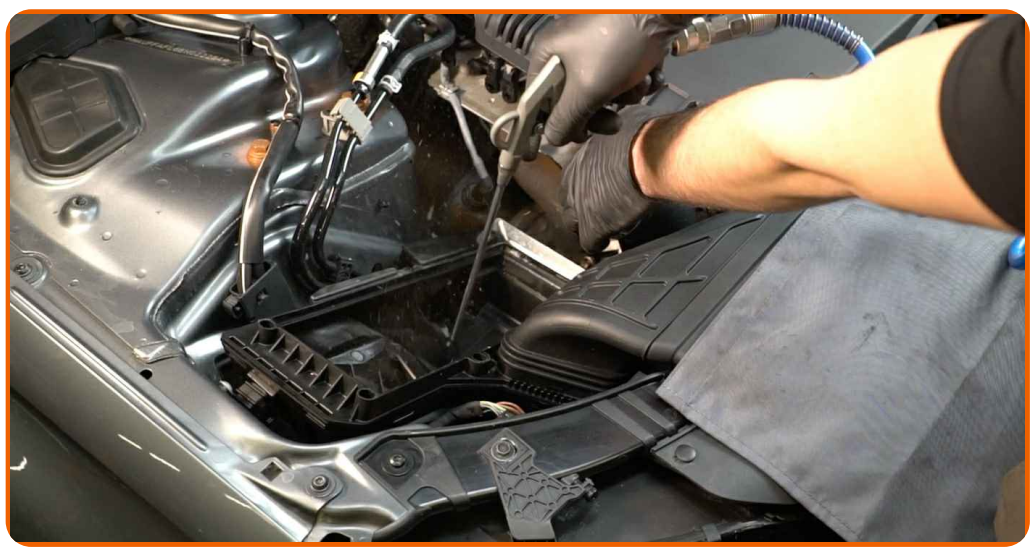

Replacement: air filter – AUDI A5 Coupe (8T3). Tip:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

11 Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

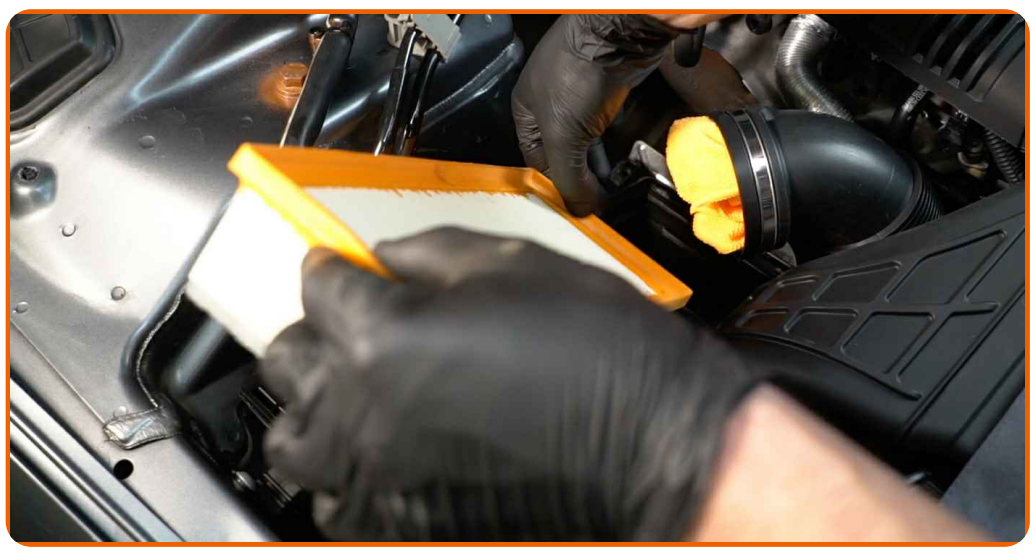


Replacement: air filter – AUDI A5 Coupe (8T3). Tip from AUTODOC experts:

- Check out the correct location of the filter element. Do not skew.
- Attention! Use quality filters – AUDI A5 Coupe (8T3).
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

12 Reinstall the air filter cover. Fasten it.



13 Screw in the fastening screws of the air filter cover. Use Torx T30. Use a ratchet wrench.

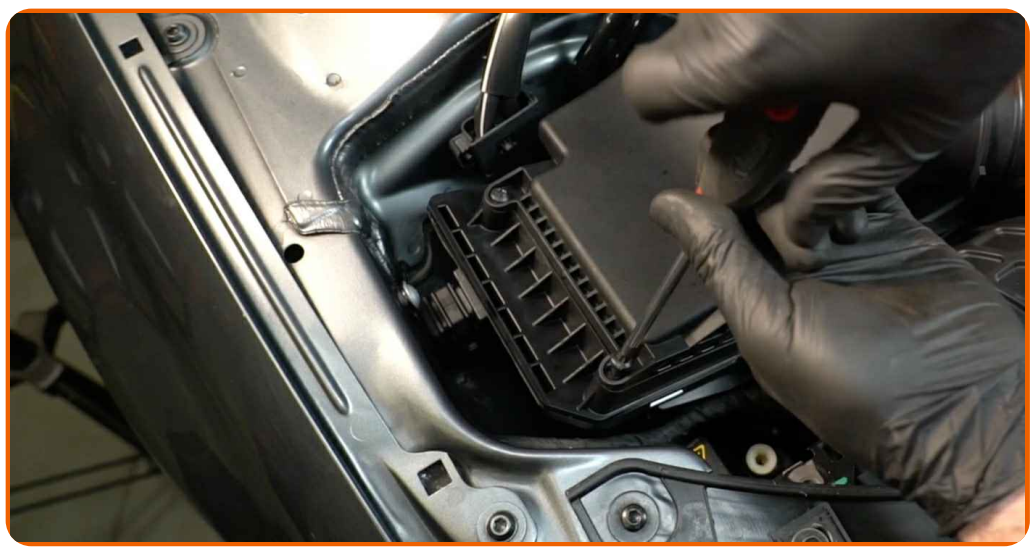

14 Remove the microfibre towel from the air intake hose.



15 Connect the air intake pipe to the air filter housing.



16 Fasten the clamp on the air intake hose. Use a drive socket #7. Use a ratchet wrench.



17 Plug in the mass air flow sensor conntector.



18 Remove the fender protection cover.

19 Close the hood.

WELL DONE!

VIEW MORE TUTORIALS

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.